

EC20204

VARIABLE EXTERNAL ANGLE 130X28 WHITE RAL 9001



Canalizaciones > Pared y techo > Zócalo y marco > Serie 20 -
accesorios > Ángulo exterior para canal de pared en zócalo

Technical Symbols/Marks/Approvals

IP40	IK08	GWT 650°	CE	RoHS II		MADE IN ITALY
------	------	-------------	----	---------	--	---------------------

Estándares

EN 50085-1 EN 50085-2-1

Descripción

External angle composed of a flexible internal section, quickly attached with screws, which allows for insulation and continuous separation of cables within their compartments. Rigid cover, adjustable from 60° to 120°, snaps on. Designed with rounded lines and no sharp edges to minimize accidental impacts and the possibility of detachment from the trunking.


Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000849 - Outer corner for skirting duct

Degree of protection (IP)	IP40	Material	Plastic	Material quality	Acrylonitrile butadiene styrene (ABS)
Halogen free	Sí	Colour	White	Impact strength	IK08
Height	130 mm	Depth	28 mm	Model	Base unit and cover
RAL-number	9001	Sealing lip cover	None	Decoration	None
With carpet border	No	Angle	60-120 °		

Documentation available for download

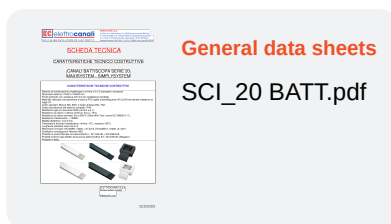

Barcode



8032793874621

Unit

1 NR

0.08 [kg]



8050880881017

Cardboard

5 NR

0.19x0.205x0.105 [m]

0.4 [kg]