



## EC20311

### 8-MODULE TOWER ADAPTOR BOX 108 mm HOLE C.E DISTANCE-SLATE RAL 7021



Canalizaciones > Pared y techo > ZÓcalo y marco > Serie 20 - accesorios > Adaptador de soluciones para canal de pared de conducción de cableado

#### Technical Symbols/Marks/Approvals

|      |      |          |    |         |               |
|------|------|----------|----|---------|---------------|
| IP40 | IK08 | GWT 650° | CE | RoHS II | MADE IN ITALY |
|------|------|----------|----|---------|---------------|

#### Estándares

EN 50085-1 EN 50085-2-1

## Description

The 4+4 module 108.5 mm center-to-center appliance box can be used to install up to 8 Italian standard appliances or 4 multi-standard sockets. A row, with the supplied accessories, can be reduced to 3 modules. The large internal volume allows for the installation of any appliance. The box is composed of three assembled parts: the lower part, which snaps onto the trunking and the wall with 4 screws, and serves as an insulating base and a grid separating the various circuits. The upper part is appropriately shaped to accommodate the appliance fixing frames. The trunking cover, in addition to its protective function, gives the whole a harmonious and elegant shape.

## Etim

**GROUP EG000006 - Installation ducts for wall and ceiling**


**CLASS EC000079 - Appliance box for skirting duct**

|                                   |       |                                          |            |                              |            |
|-----------------------------------|-------|------------------------------------------|------------|------------------------------|------------|
| <b>Degree of protection (IP)</b>  | IP40  | <b>Mounting direction</b>                | Horizontal | <b>Material</b>              | Plastic    |
| <b>Halogen free</b>               | Sí    | <b>Anti-bacterial treatment</b>          | No         | <b>Colour</b>                | Anthracite |
| <b>Impact strength</b>            | IK08  | <b>RAL-number</b>                        | 7021       | <b>Working temperature</b>   | -5-60 °C   |
| <b>Decoration</b>                 | None  | <b>Mounting method installation unit</b> | Standard   | <b>Height baseboard duct</b> | 130 mm     |
| <b>Depth plinth skirting duct</b> | 28 mm | <b>Number of device units</b>            | 8          | <b>Equipped with</b>         | None       |

## Technical Characteristics

**Dimensiones** 170 x 340 x 50 mm

## Documentation available for download

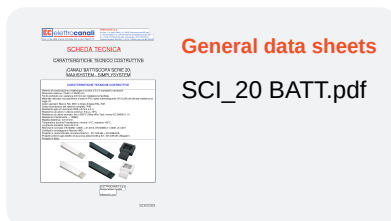

## Barcode



8032793876823

**Unit**

1 NR

0.505 [kg]



8059307212830

**Cardboard**

4 NR

0.39x0.295x0.21 [m]

2.02 [kg]