


EC23401



FLEXIBLE SLOTTED TRUNKING SCREW FIXING 12,5X12,5X500

Canalizaciones > Cableado > Canales de cuadro > Flexible >
Canales ranurados flexible > Fijación con tornillo

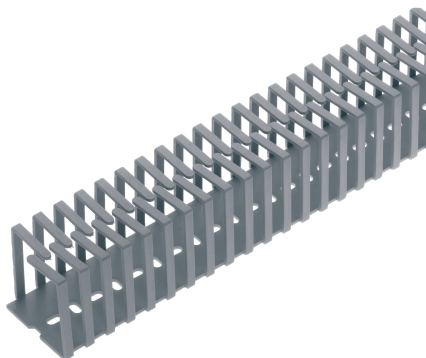

Technical Symbols/Marks/Approvals



Estándares

EN 50085-1 EN 50085-2-3 UL 1565

Descripción

Flexible wiring duct made of self-extinguishing UL94-V2 polypropylene technopolymer. Pre-drilled bottom for installation with fixing screws.

Etim

GROUP EG000007 - Slotted cable trunking system

CLASS EC000012 - Slotted cable trunking system

Material	Polypropylene (PP)	Halogen free	No	Colour	Grey
Type of fastening	Bottom perforation	Width	12.5 mm	Height	12.5 mm
Length	500 mm	Distance of slots	7.5 mm	Slit width	7.5 mm
Type of side wall	Slotted	Self-extinguishing	Sí	Flexible	Sí
Usable cross section	121 mm²	With cover	Sí	RAL-number	7030

Barcode



8050880881253

Cardboard

112 NR

1.4 [kg]