

EC460F

PERFORATED DIN RAIL 35X7,5 - BAR LENGHT 2 m

Canalizaciones > Canaleta de panel ranurado > Canales y
accesorios > Carriles din > Carriles din

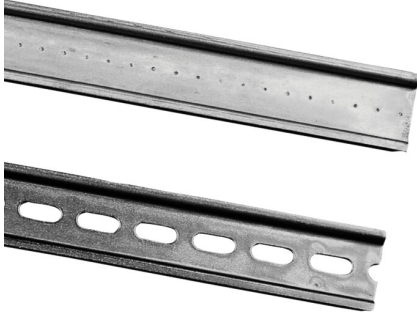


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Technical Symbols/Marks/Approvals



RoHS II

MADE
IN
ITALY

Estándares

DIN 50022

Description

DIN rails made of corrosion-resistant tropicalized galvanized steel. Compliant with DIN EN 50022. Perforated bottom.

Etim

GROUP EG000015 - Energy distribution systems

CLASS EC001285 - Mounting rail

Material	Steel	Surface protection	Galvanic/electrolytic zinc plated	Height	7.5 etim.un.eu570448.abb
Model	DIN rail (top hat rail) 35/7.5 mm	Length	2000 etim.un.eu570448.abb	Drill hole distance centrally	0 etim.un.eu570448.abb
Punch shape	Long-slot	Material thickness	1 etim.un.eu570448.abb		

Barcode



8050880881611

Cardboard

20 NR

16.4 [kg]