

EC625003


GRP POLYESTER ENCLOSURE SOLID DOOR 54 MODULES (3X18) 435X505X215 mm



IMMAGINE
RAPPRESENTATIVA

Envoltorios > Montaje en pared > Cuadros de poliÉster reforzado con fibra de vidrio > Armarios > Armario de distribución (vacío) > Puerta ciega

Technical Symbols/Marks/Approvals

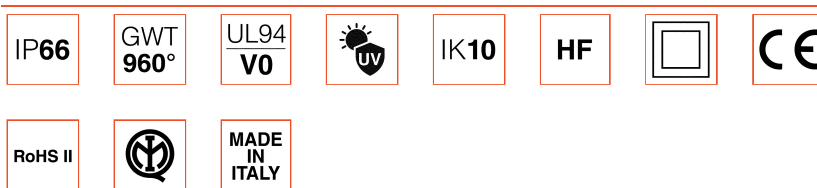

Estándares

EN 62208

Etim

GROUP EG000011 - Enclosures/cabinets

CLASS EC000261 - Enclosure/cabinet (empty)

Degree of protection (IP)	IP66	Material	Other	Material quality	GRP (Glass fibre reinforced plastic)
Surface finishing	Untreated	Colour	Grey	Impact strength	IK10
Width	435 mm	Height	505 mm	Depth	215 mm
With cover	Sí	RAL-number	7035	With mounting plate	No
Pre-stamping	No	EMC-version	No	Suitable for wall mounting	Sí
Couplable	Sí	Mounting plate depth-adjustable	Sí	Suitable for wall built-in	No
Pole fastening	Sí	With door	Sí	Number of doors	1
With glazed door	No	With ventilation door	No	With rear door	No
Number of locks	2	Transparent cover	No	Suitable for outdoor set-up	Sí
Pitched roof	No	Number of connector holes	0	Thermal dissipation (Delta T = 20 K) according to IEC/TR 60890	53 W
Max. permitted load of the mounting plate according to IEC 62208	35 kg				

Documentation available for download



Instruction booklet

Istruzioni_625_042
3.pdf



Certification

MI22-0079305-01a
- ELETTRICANALI
SPA - HCI_1 -
TR_625.pdf



Certification

MI22-0079305-01b
- ELETTRICANALI
SPA - pH -
TR_625.pdf



Certification

MI22-0079305-01c
- ELETTRICANALI
SPA - HCI_3 -
TR_625.pdf



Certification

MI22-0079343-
01_TR_625.pdf



Certification

Serie 625
IMQ_CA02.06897_
2024.pdf



Brochure

Quadri Poliestere
IT.pdf



Brochure

Quadri
Poliestere_ENG.pdf

Barcode



8053676570362

Unit

1 NR

6.3 [kg]