



## EC63148

### FLUSH-MOUNT MODULAR ENCLOSURE IP40 48 MOD. METAL DOOR WHITE RAL9003



Envoltorios > Empotrable > Armarios modulares > 631-636 -  
con puerta metálica > Cuadro de distribución pequeño > Para  
muros de mampostería

#### Technical Symbols/Marks/Approvals



#### Estándares

EN 60670-1 EN 60670-24

## Etim

### GROUP EG000023 - Distribution boards


### CLASS EC000214 - Small distribution board

|                        |               |                           |             |                                     |         |
|------------------------|---------------|---------------------------|-------------|-------------------------------------|---------|
| Mounting method        | Flush-mounted | Degree of protection (IP) | IP40        | Width in number of modular spacings | 56      |
| Built-in depth         | 84 mm         | Colour                    | White       | Width                               | 368 mm  |
| Height                 | 753 mm        | Depth                     | 93 mm       | Built-in height                     | 84 mm   |
| RAL-number             | 9003          | Type of covering          | Door        | Type of door                        | Single  |
| Transparent cover/door | No            | With lock                 | No          | Inner depth                         | 84 mm   |
| Number of rows         | 4             | Extension possible        | No          | Housing material                    | Plastic |
| With mounting plate    | No            | Type of closure           | Push button | Earthing terminal block             | Sí      |
| Neutral terminal block | Sí            | DIN-rail                  | Sí          | EMC-version                         | No      |

## Technical Characteristics

|             |               |                                 |                     |                                             |     |
|-------------|---------------|---------------------------------|---------------------|---------------------------------------------|-----|
| Dimensiones | 368x753x93 mm | Bloques de terminales/orificios | 4 - (2x25)+ (14x16) | Disipación de potencia (vatios) EN 60670-24 | 100 |
|-------------|---------------|---------------------------------|---------------------|---------------------------------------------|-----|

## Documentation available for download

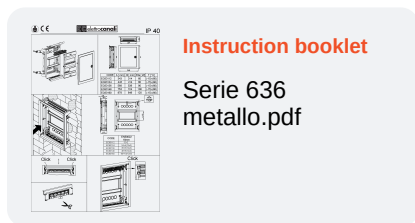

## Barcode



8056351666862

**Unit**

1 NR

5.43 [kg]