

**EC6900726**



**BOARD FOR CONSTRUCTION SITE  
ASC 5 SOCKETS IOSBF - TERMINAL  
BLOCKS**



IMMAGINE  
RAPPRESENTATIVA



REPRESENTATIVE  
IMAGE

Industrial > Cuadros de distribución > Cuadros de distribución  
> Serie asc - sistema de paneles 700 > Cuadro eléctrico para  
obra > 5 tomas horizontales con bloqueo - alimentación con  
bornera

**Technical Symbols/Marks/Approvals**

IP65

GWT  
650°



CE

RoHS II



MADE  
IN  
ITALY

**Estándares**

EN 61439-1 EN 61439-4

## Etim

### GROUP EG000023 - Distribution boards


### CLASS EC000484 - Energy distributor for construction site

|                                                                              |                     |                                                                             |         |                                                                             |        |
|------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------|--------|
| Rated current                                                                | 63 A                | Leakage current type                                                        | Other   | Degree of protection (IP)                                                   | IP65   |
| Width                                                                        | 677 mm              | Height                                                                      | 658 mm  | Depth                                                                       | 288 mm |
| Model                                                                        | Distributor cabinet | Housing material                                                            | Plastic | Number of socket outlets with protective contact CEE 7/3 (type F)           | 0      |
| Number of socket outlets Swiss standard type 13                              | 0                   | Number of socket outlets Swiss standard type 15                             | 0       | Number of socket outlets Swiss standard type 23                             | 0      |
| Number of socket outlets Swiss standard type 25                              | 0                   | Number of miniature circuit breakers (MCB)                                  | 2       | Rated voltage                                                               | 400 V  |
| Connected load                                                               | 31.5 kW             | Number of CEE socket outlets (IEC 60309) 16 A / 24 V / 2P (L, N)            | 0       | Number of CEE socket outlets (IEC 60309) 16 A / 230 V / 3P (L, N, PE)       | 3      |
| Number of CEE socket outlets (IEC 60309) 16 A / 230 V / 5P (1, 2, 3, N, PE)  | 0                   | Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 4P (1, 2, 3, PE)    | 1       | Number of CEE socket outlets (IEC 60309) 16 A / 400 V / 5P (1, 2, 3, N, PE) | 0      |
| Number of CEE socket outlets (IEC 60309) 32 A / 230 V / 4P (1, 2, 3, PE)     | 0                   | Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 4P (1, 2, 3, PE)    | 0       | Number of CEE socket outlets (IEC 60309) 32 A / 400 V / 5P (1, 2, 3, N, PE) | 1      |
| Number of CEE socket outlets (IEC 60309) 63 A / 230 V / 4P (1, 2, 3, PE)     | 0                   | Number of CEE socket outlets (IEC 60309) 63 A / 400 V / 5P (1, 2, 3, N, PE) | 0       | Number of CEE socket outlets (IEC 60309) 125 A / 230 V / 4P (1, 2, 3, PE)   | 0      |
| Number of CEE socket outlets (IEC 60309) 125 A / 400 V / 5P (1, 2, 3, N, PE) | 0                   | Number of meter panels                                                      | 0       | Main switch                                                                 | Other  |
| Main switch rated current                                                    | 63 A                | Number of poles main switch                                                 | 4       | Number of earth leakage switches 10 mA                                      | 0      |
| Number of earth leakage switches 30 mA                                       | 1                   | Number of earth leakage switches 100 mA                                     | 0       | Number of earth leakage switches 300 mA                                     | 0      |
| Emergency stop button                                                        | Sí                  | Suitable according to IEC/EN 61439-4                                        | Sí      |                                                                             |        |

## Technical Characteristics

|                |   |                             |      |                             |      |
|----------------|---|-----------------------------|------|-----------------------------|------|
| Prese_16A_2P+T | 3 | Prese_32A_2P+T              | -    | Prese_16A_3P+N+T            | -    |
| Prese_16A_3P+T | 1 | protección de salida mt 16A | 1x4P | protección de salida mt 32A | 1x4P |
| prese_32A_3P+T | - | Prese_32A_3P+N+T            | 1    |                             |      |

## Documentation available for download

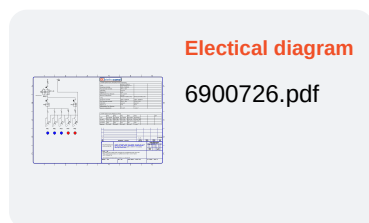

## Barcode



8056351662321

**Unit**

1 NR

26 [kg]