

ECCP40100B

CABLE TRUNKING WITH COVER DIM. 40X100 WHITE

Goulottes > Mur et plafond > SystÈmes de goulottes > SÈrie cp
- goulottes > Goulotte d'installation > Blanc



IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Symboles/marques/approbations techniques



Normes

EN 50085-1 EN 50085-2-1

Description

Cable duct made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. A front-hinged lid is included.


Etim

GROUP EG000006 - Goulottes d'installation murales et de plafond

CLASS EC001938 - Goulotte d'installation

Classe de protection (IP)	IP40	Matériau	Plastique	Qualité du matériau	PVC
Sans halogène	No	Traitement antibactérien	No	Traitement de surface	Non traité
Couleur	Blanc	Résistance aux chocs	IK07	Largeur	40 mm
Profondeur	100 mm	Longueur	2 m	Section transversale utile	3110 mm²
Numéro RAL	9001	Type de montage des parties supérieures	Global	Film de protection	No
Température d'utilisation	-5-60 °C	Nombre de cloisons enfichables	0	Avec agrafe pour tenue de câble	No
Avec connecteur de conduit	No	Perforation de montage dans le sol	No	Nombre de parties supérieures	1
Largeur de la partie supérieure 1	40 mm	Symétrique	Oui	Parties supérieures fournies	Oui
Type rectangulaire	Oui	Finition du panneau arrière (intérieur)	Perforé		

Documentation disponible en téléchargement

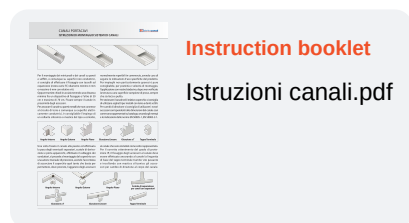

Code à barres



8050880887392

Cardboard

32 MT

0.26x0.18x2.027 [m]

30 [kg]



8055035961774

Pallet

576 MT

1.2x0.8x2.2 [m]

540 [kg]