

EC23403



**FLEXIBLE SLOTTED TRUNKING
SCREW FIXING 20X20X500**

Goulottes > Fendue > Goulottes et accessoires > Souple > Goulotte de câblage > Fixation par vis

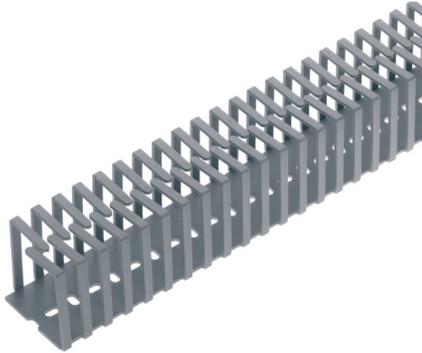


IMMAGINE RAPPRESENTATIVA REPRESENTATIVE IMAGE

Symboles/marques/approbations techniques



Normes

EN 50085-1 EN 50085-2-3 UL 1565

Description

Flexible wiring duct made of self-extinguishing UL94-V2 polypropylene technopolymer. Pre-drilled bottom for installation with fixing screws.

Etim

GROUP EG000007 - Goulottes de câblage

CLASS EC000012 - Goulotte de câblage

Matériau	Polypropylène	Sans halogène	No	Couleur	Gris
Type de fixation	Perforation du fond	Largeur	20 mm	Hauteur	20 mm
Longueur	500 mm	Distance entre les fentes	7.5 mm	Largeur de fente	7.5 mm
Finition de paroi latérale	Rainuré	Auto-extinguible	Oui	Flexible	Oui
Section transversale utile	342 mm ²	Avec partie supérieure	Oui	Numéro RAL	7030

Code à barres



8050880881277

Cardboard

112 NR

2.9008 [kg]