



## ECL4705TEC

Residential > Wiring devices > Mylife > Mylife devices tec > Dimmer > Rotary dimmer for inductive and resistive loads



### Technical Symbols/Marks/Approvals




## Etim

### GROUP EG000013 - Domestic switching devices

### CLASS EC000025 - Dimmer

<b>Mounting method</b>	Built-in installation	<b>Number of units</b>	1	<b>Material</b>	Plastic
<b>Material quality</b>	Thermoplastic	<b>Halogen free</b>	No	<b>Surface protection</b>	Untreated
<b>Surface finishing</b>	Glossy	<b>Colour</b>	Grey	<b>Transparent</b>	No
<b>Impact strength</b>	IK00	<b>Type of fastening</b>	Mounting with screw	<b>Suitable for degree of protection (IP)</b>	IP20
<b>Assembly arrangement</b>	Basic element	<b>Device width</b>	22 mm	<b>Device height</b>	46.77 mm
<b>Device depth</b>	39.53 mm	<b>Min. depth of built-in installation box</b>	39.53 mm	<b>Operating method</b>	Turn button
<b>App control via Bluetooth</b>	No	<b>Serial dimmer</b>	No	<b>Type of load</b>	Inductive load
<b>Substation input</b>	No	<b>Light value memory</b>	No	<b>Applicable with button</b>	No
<b>Applicable with movement sensor</b>	No	<b>Applicable with presence indicator</b>	No	<b>Applicable with time switch/timer</b>	No
<b>Applicable with transmission button</b>	No	<b>Applicable with infrared button</b>	No	<b>Nominal voltage</b>	230-230 V
<b>Frequency</b>	50-60 Hz	<b>Nominal power resistive load</b>	20-150 W	<b>Nominal power inductive load</b>	20-100 VA
<b>Connection type</b>	Other	<b>Compatible with Apple HomeKit</b>	No	<b>Compatible with Google Assistant</b>	No
<b>Compatible with Amazon Alexa</b>	No				

## Documentation available for download

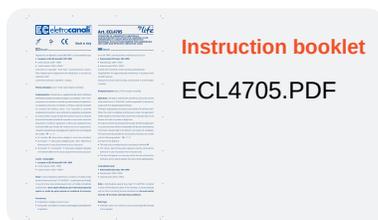

## Barcode



8053676577262

**Unit**

1 NR

0.0725 [kg]




8059606159676

**Pack**

6 NR

0.19x0.1x0.05 [m]

0.435 [kg]



8032636767189

**Cardboard**

120 NR

0.215x0.4x0.31 [m]

8.7 [kg]