


ECTG1220

RIGID CONDUIT 22211 Ø20 mm - 3 m

Conduits and fittings > Conduits > Rigid conduits > Series tg12
- pvc - class 22211 - 320 n > plastic conduits > 3 meters -
length

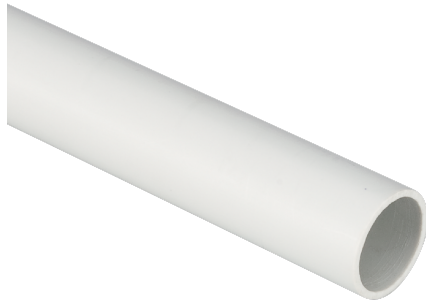

Technical Symbols/Marks/Approvals



Norms

EN 61386-1 EN 61386-21

Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

| | | | | | |
|---|---------------------------|--|---------------------------|--|---------|
| Flush-mounted installation | Yes | Material | Polyvinyl chloride (PVC) | Halogen free | No |
| Colour | Grey | RAL-number | 7035 | UV resistant | Yes |
| Suitable for underground installation | No | Operating temperature | -5-60 °C | Bending strength | Rigid |
| Compressive strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | Impact strength class according to EN 61386-1 | Light (class 2 / 1 Joule) | With sleeve | No |
| Fire retardant version | Yes | Surface mounting | Yes | Suitable for installation on wood | Yes |
| Suitable for hollow wall installation | Yes | Suitable for concrete installation | No | Machine and systems installation | No |
| Suitable for underfloor installation (screed) | No | Suitable for outdoor installation | No | Inner diameter | 17.9 mm |
| Outer diameter | 20 mm | High conducting inner coating | No | With metre indication | No |

Technical Characteristics

Lunghezza Barra 3 m

Barcode



8054320285083

Cardboard

102 MT

9.9348 [kg]



8057711598533

Pallet

2040 MT

3x0.61x0.63 [m]

198.696 [kg]