

EC75316

BEND 90° IP65 Ø16 mm - GREY - SPEED SYSTEM



IMMAGINE RAPPRESENTATIVA REPRESENTATIVE IMAGE

Conduits and fittings > Accessories and fittings > Joints and fittings > Speed system - ip65 fittings > Coupler bend conduit - conduit > 90° bend

Technical Symbols/Marks/Approvals



Norms

EN 61386-1 EN 61386-21

Description

90° bend for the connection between two pipes of identical diameter, made of shockproof technopolymer based on rigid PVC. Soft internal sealing ring for pipe tolerance compensation. IP65 protection rating. V0 self-extinguishing grade according to UL94 standard. Resistance to abnormal heat (GWT IEC 60695-2-11): up to 960 °C. Manufactured in compliance with EN 61386-1 and EN 61386-21 standards.

Diameter 16 mm - bending radius 54 mm


Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC000936 - Bend for installation tubes

Material	Plastic	Material quality	Polyvinyl chloride (PVC)	Halogen free	No
Surface protection	Untreated	Colour	Grey	Model	Plug-in
Diameter	16 mm	Flexible	No	UV resistant	Yes
Quality of surface coating	Uncoated	Surface polished	No	Surface brushed	No
Compressive strength class according to EN 61386-1	None	Impact strength class according to EN 61386-1	Medium (class 3 / 2 Joule)	For nominal tube diameter	16 mm
With sleeve	Yes	Two-part	No	With inspection opening and cover	No
Radius	54 mm	Bend angle	90 °		

Documentation available for download

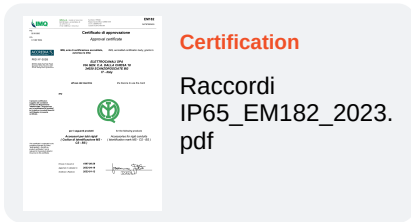

Barcode



8050507872183

Pack

10 NR

0.19 [kg]



8050507872190

Cardboard

200 NR

0.39x0.295x0.21 [m]

3.8 [kg]