

ECICTA50BL

HF ICTA PLIABLE PP CONDUIT 34223 Ø50 mm - 25 m - BLUE



Tuberías y accesorios > Tubería > Tubos corrugados (mangueras) > Serie icta - pp - 34223 - 750 n > Tubo plástico para instalación eléctrica > Negro



IMMAGINE RAPPRESENTATIVA **EC** REPRESENTATIVE IMAGE

Technical Symbols/Marks/Approvals



Estándares

EN 61386-1 EN 61386-22 EN 61034-2 EN 50642


Etim

GROUP EG000002 - Pipes/hoses for cable installation

CLASS EC001174 - Plastic installation tube

Flush-mounted installation	Sí	Material	Polypropylene (PP)	Halogen free	Sí
Colour	Blue	RAL-number	5005	UV resistant	No
Suitable for underground installation	No	Operating temperature	-5-90 °C	Bending strength	Pliable, self recovering
Compressive strength class according to EN 61386-1	Medium (class 3 / 2 Joule)	Impact strength class according to EN 61386-1	Heavy (class 4 / 6 Joule)	With sleeve	No
Fire retardant version	Sí	Surface mounting	No	Suitable for installation on wood	Sí
Suitable for hollow wall installation	Sí	Suitable for concrete installation	Sí	Machine and systems installation	No
Suitable for underfloor installation (screed)	Sí	Suitable for outdoor installation	No	Inner diameter	38 mm
Outer diameter	50 mm	High conducting inner coating	Sí	With metre indication	No

Documentation available for download

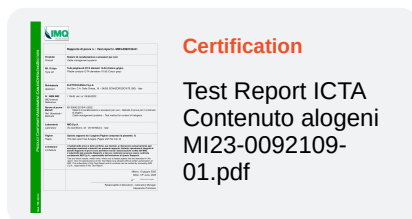

Barcode



8055035963280

Cardboard

25 MT

4.87 [kg]



8055035963297

Pallet

800 MT

155.84 [kg]