

ECS2525BL



SLOTTED TRUNKING WITH COVER S 4/6/4 DIM. 25X25 BLUE

Goulottes > Systèmes de tableaux de distribution > Systèmes de câblage > Goulottes > Goulotte de câblage > Bleu - type s - lamelles Étroites 4/6/4

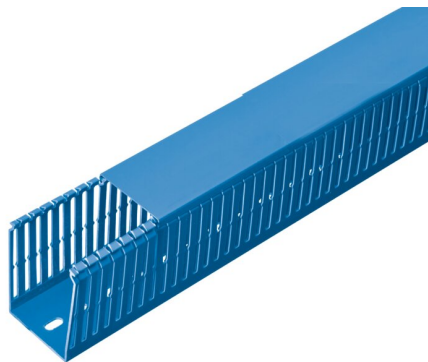


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Symboles/marques/approbations techniques

UL94 V0	GWT 960°	CE	RoHS II	MADE IN ITALY
------------	-------------	----	---------	---------------------

Normes

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Goulottes de câblage

CLASS EC000012 - Goulotte de câblage

Matériau	PVC	Sans halogène	No	Couleur	Bleu
Type de fixation	Perforation du fond	Largeur	25 mm	Hauteur	25 mm
Longueur	2 m	Distance entre les fentes	6 mm	Largeur de fente	4 mm
Finition de paroi latérale	Poinçonnage à trous/fentes	Auto-extinguible	Oui	Flexible	No
Section transversale utile	480 mm²	Avec partie supérieure	Oui	Numéro RAL	5012

Caractéristiques techniques

Prédisposition du séparateur NO

Code à barres



8056351666183

Cardboard

100 MT

0.248x0.143x2.03 [m]

20.5 [kg]



8055035960210

Pallet

2000 MT

1.2x0.8x2.2 [m]

410 [kg]