elettrocanali
THE ITALIAN EVOLUTION OF ELECTRICITY

TECHNICAL DATA SHEET

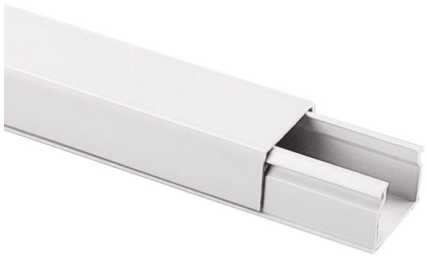


IMMAGINE RAPPRESENTATIVA — REPRESENTATIVE IMAGE

ECMC4017AB

MINITRUNKING WRAP-AROUND LID 40X17 WHITE 2 COMPARTMENTS

Trunkings > Wall and ceiling > Miniature solid trunkings > Series mca - wrap-around lid > Mini/maxi trunkings > White

Technical Symbols/Marks/Approvals

IP20 | IK04 | UL94 V0 | GWT 960° | CE | RoHS II | MADE IN ITALY

Norms

EN 50085-1 EN 50085-2-1

Description

Mini-trunking made of self-extinguishing rigid PVC technopolymer. The bottom is pre-drilled for fixing with screws and anchors. The bottom is designed for quick attachment with silicone adhesives. The bottom features lateral spacing profiles for corner installation. The rounded wraparound lid is supplied assembled and can only be disassembled with a tool.

Etim

GROUP EG000006 - Installation ducts for wall and ceiling

CLASS EC000059 - Mini/maxi trunking

Degree of protection (IP)	IP20	**Material**	Plastic	**Material quality**	Polyvinyl chloride (PVC)
Halogen free	No	**Anti-bacterial treatment**	No	**Surface protection**	Untreated
Colour	White	**Transparent**	No	**Impact strength**	IK04
Type of fastening	Bottom perforation	**Width**	40 mm	**Height**	17 mm
Length	2000 mm	**Usable cross section**	416 mm²	**RAL-number**	9001
With protective foil	No	**Working temperature**	-5 ÷ 60 °C	**Cover model**	Loose
Suitable for circuit integrity	No	**Number of permanent partitions**	1	**Number of plug-in partitions**	0
With cable fixing clip	No	**With duct connector**	No	**Delivery on roll**	No
Pre-stamping	No				

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Documentation available for download



Instruction booklet

Istruzioni minicanali.pdf



Certification

Minicanali Serie MCA.pdf

Barcode

8054320287209

Cardboard

80 MT

0.248x0.143x2.03 [m]

23 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.