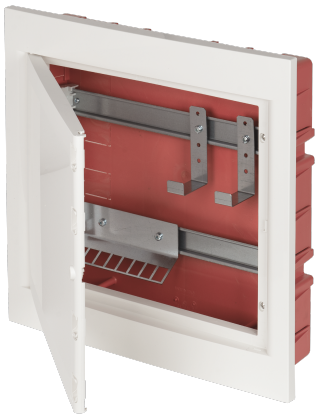


EC63336C

FLUSH-MOUNT MOD. ENCL. MULTIMEDIA 36 MOD. WHITE SOLID DOOR

Enclosures > Recessed > Recessed modular enclosures > Series 633-638 - multimedia modular enclosures > Small distribution board > Masonry enclosure

Technical Symbols/Marks/Approvals

IP40 | GWT 650° | RoHS II | MADE IN ITALY

Norms

EN 60670-1 EN 60670-24

Description

Flush-mounting QDSA distribution board for FTTH systems for masonry walls. Base made of high-impact technopolymer with low smoke emission. Resistance to abnormal heat up to 650°C (GWT). Halogen-free ABS technopolymer cover. Reversible cover. Halogen-free ABS technopolymer door. Option to install a cylinder safety lock. Door closure with spring-loaded sliding inserts. High-gloss finish on outer frame and door. Galvanized steel DIN rail mounted on a removable and adjustable support for perfect horizontal alignment. Equipped with 1 component mounting plate featuring 8 slots for keystone jacks and 2 adjustable support shelves to hold a device. Manufactured in compliance with EN 60670-1:2005 and EN 60670-22:2013 standards. Installation temperature range: minimum -15°C, maximum +60°C. IP40 protection degree.
External dimensions 430x410 mm
Base depth 80 mm
36 DIN modules (2x18)
Dissipated power 52 W

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.

Etim

GROUP EG000023 - Distribution boards

CLASS EC000214 - Small distribution board

Mounting method	Flush-mounted	**Degree of protection (IP)**	IP40	**Width in number of modular spacings**	36
Built-in depth	80 mm	**Colour**	White	**Width**	430 mm
Height	410 mm	**Depth**	100 mm	**Built-in width**	405 mm
Built-in height	80 mm	**RAL-number**	9001	**UV resistant**	No
Type of covering	Door	**Cover model**	With notch	**Type of door**	Single
Transparent cover/door	No	**With lock**	No	**Inner depth**	80 mm
Number of rows	2	**Extension possible**	No	**Housing material**	Plastic
With mounting plate	No	**Signal passing door**	No	**Type of closure**	Other
Earthing terminal block	No	**Neutral terminal block**	No	**DIN-rail**	Yes
EMC-version	No				

Technical Characteristics

dimensions	430x410x80 mm	**Power dissipation**	52 W

Dimensions and technical drawings

EC63336_COPERCHIO_2025.pdf

EC63036_FONDO_2025.pdf

Barcode

8056351666817

Unit

1 NR

0.42x0.45x0.16 [m]

2.717 [kg]

Information, dimensions, diagrams and images are provided for informational purposes only and are current as of the date indicated. These elements may be subject to change at any time.